



We Know Water.

INTRODUCING MAXXFILL™ FLEX

The Choice is Yours.

MaxxFill Flex gives you the flexibility to choose what's best for your customers. Connect directly to a water line and use as a POU cooler. Or take advantage of its convenient bottom-load access to use as a standard bottle cooler.

All MaxxFill™ products include advanced features to meet the changing hydration needs of users.



EverStream™ System

Fill up faster and more often with 1.5x the capacity of standard bottle coolers.



BottleFlex™ Alcove

Tallest on the market (13"); fits virtually any size bottle without tipping.



SmartAdapt™ Operation

Lets you easily switch from POU to bottle mode.



Freshield™ Antimicrobial

Protects against growth of odor causing, staining micro-organisms.



Why MAXXFILL Flex:

- High flow output of 3.5 lpm for faster fill up
- Dual water supply option lets users use a water bottle or plumb directly to water line
- LED night light in front alcove
- Push buttons, drip tray and door contain Freshshield® antimicrobial to protect surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew.

Cold Water Refrigeration Unit:

Convection cooled condenser. Internal, spring mounted, hermetically sealed compressor with automatic overload protector requires no lubrication. Refrigerant is controlled by a capillary tube.

Cold Water Reservoir:

Type 300 series stainless steel with external aluminum evaporator plate. Encased in pre-fitted molded plastic foam insulation. Adjustable mechanical cold control.

One-Piece Hot Water Tank:

500 watt easy to service or replace heating element. One-piece tank is easy to replace or service without breaking soldered refrigeration connections. Hot tank is a type 300 series stainless steel.

Hot Water Capacity:

45 x 6 oz. cups of piping hot water per hour. 1-1/2 quart storage tank.

Hot Water Safety Faucet:

Self-closing activation requires a two-step action that is easy for adults to use but protects small children.


Drip Receptor:

Durable dishwasher safe drip tray lifts out for easy cleaning.

Electrical:

115 volts, 60 hertz, 1/9 hp water cooler compressor. Three wire service cord & polarized plug.

SmartAdapt™

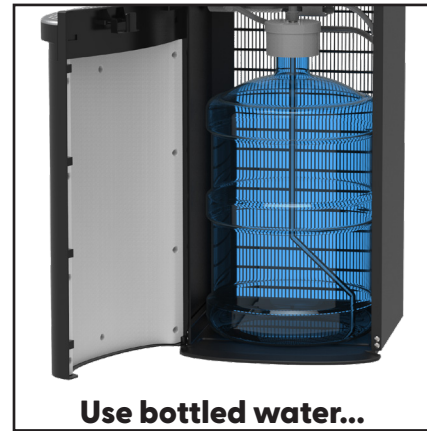

BXM1SHS				
DIMENSIONS	DEPTH	WIDTH	HEIGHT	WEIGHT
	PRODUCT	14.2"	12.2"	42.33"
PACKAGING	15.7"	14"	45.7"	38 lbs
COLD WATER CAPACITY	ROOM TEMP	WATER TEMP	GALLONS PER HOUR AT 50°F	NUMBER OF 3 OZ. CUPS PER HOUR
	70°F	70°F	2	85
	80°F	80°F	1.5	64
	90°F	90°F	0.9	38
	100°F	100°F	0.6	25



WARNING:
Cancer and Reproductive Harm
www.P65Warnings.ca.gov

Specifications are subject to change without notice.